


Technical information

More information: www.effegibi.it

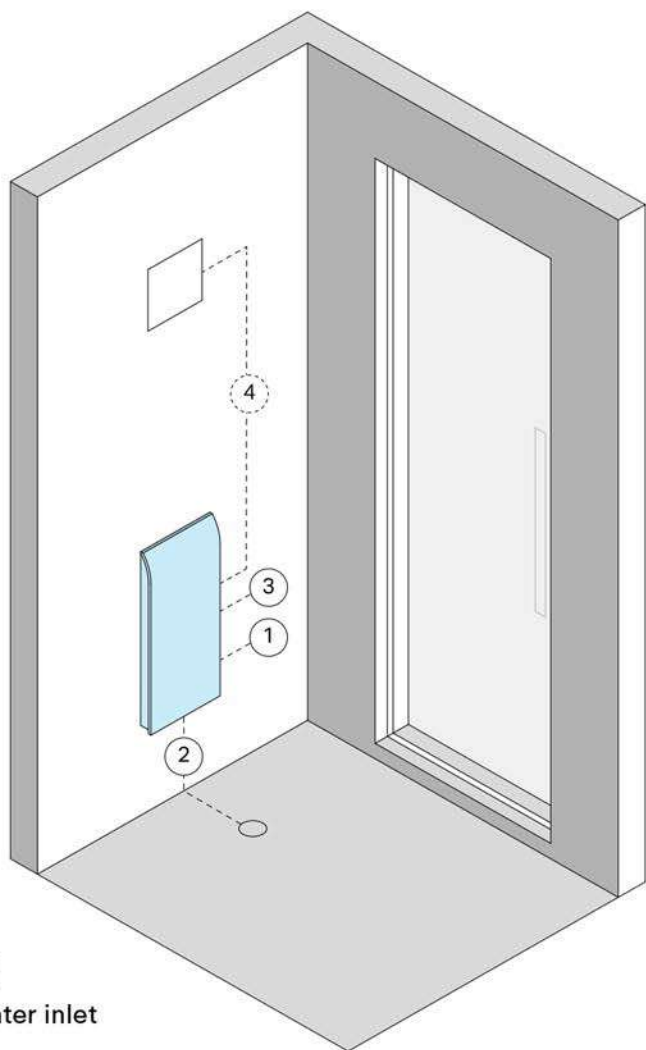

- ① Water inlet
- ② Water outlet
- ③ Electric power supply
- ④ Options connection

All work must be carried out by qualified personnel or by one of our Service Centres, based on local and international standards – CEI 64.8 (IEC 364 – 1). Make sure that the electric and plumbing connections for the steam generator have been correctly set up (water line with closing gate valve, outlet siphon, power line with suitable magnetothermal residual current device, etc.) according to the related technical specifications. Connect all piping in such a way that it may be disconnected (in the event of removal of the generator for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.

A space of 380 mm x 545 mm and at least 78 mm deep must be available to house the Easystem device.

① Water inlet: set up the piping mounted flush with the casing with a ½" female thread. Hook up only cold water (max 25°C). Inlet water pressure must not exceed 8 bar (800 kPa). For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200 kPa).


CAUTION: if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.

② Water outlet: set up ½" female, heat resistant (up to 100°C) siphoned piping mounted flush with the casing. The outlet pipe must ensure correct water outflow, therefore, a downward slope of at least 5° is recommended.

③ Sheath Ø 25 for the electric power supply: set up a power cable of suitable cross-section.

④ Sheath Ø 25 for connecting the options.

EASYSTEAM

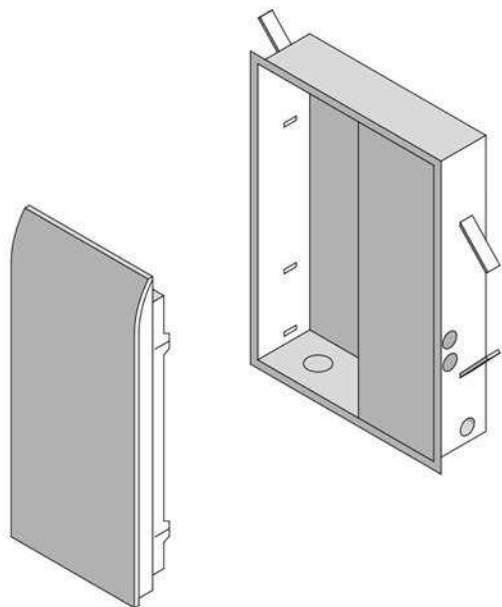

DIMENSIONS

cm 25 x 3,7 x 57 h

COUNTERBOX DIMENSIONS

cm 37 x 10 x 54 h

MATERIALS

Curved silk-screen printed glass panel
Painted aluminium RAL 9003

BUILT IN STEAM GENERATOR

Features:

- › automatic boiler cleaning system
- › water flow rate control system
- › automatic water drainage system
- › Automatic energy-saving function


TOUCH-SCREEN CONTROL PANEL

with backlit icons and temperature gauge

CONTAINERS FOR ESSENTIAL OILS

ECC - EFFEGIBI COMFORT CONTROL

This system is incorporated into steam generator so that the Turkish bath can be remotely controlled. Just download the app Effegibi Experience to your Tablet or Smartphone. Available on iOS.

 [More information](#)

EASYSTEAM 45

Space volume (cubic metres): 3,5 - 4,5

Power: 4,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz

Steam generation: 6,6 Kg/h max