
# **Mutina**


# Brac

# by Nathalie Du Pasquier

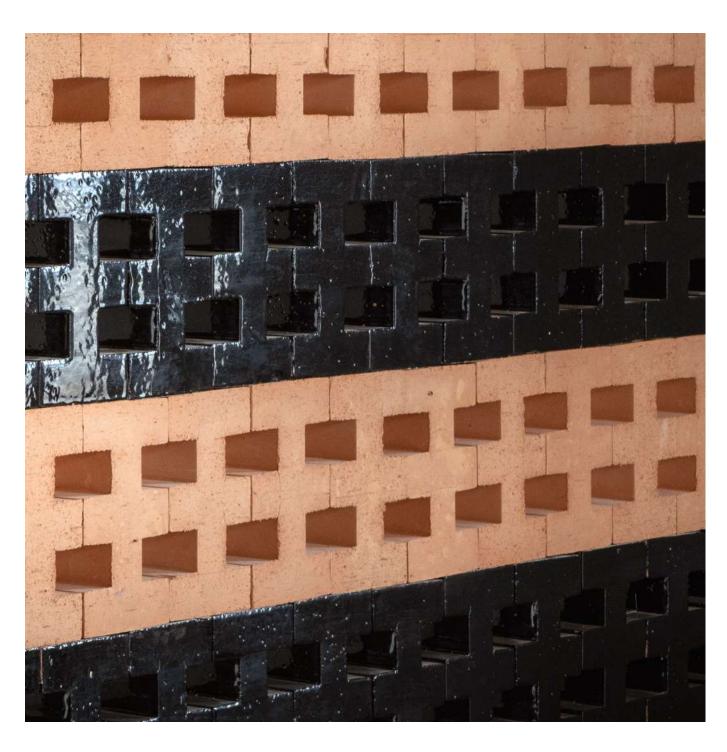


ΕN

General information Laying and maintenance tips Colors Technical features Packing

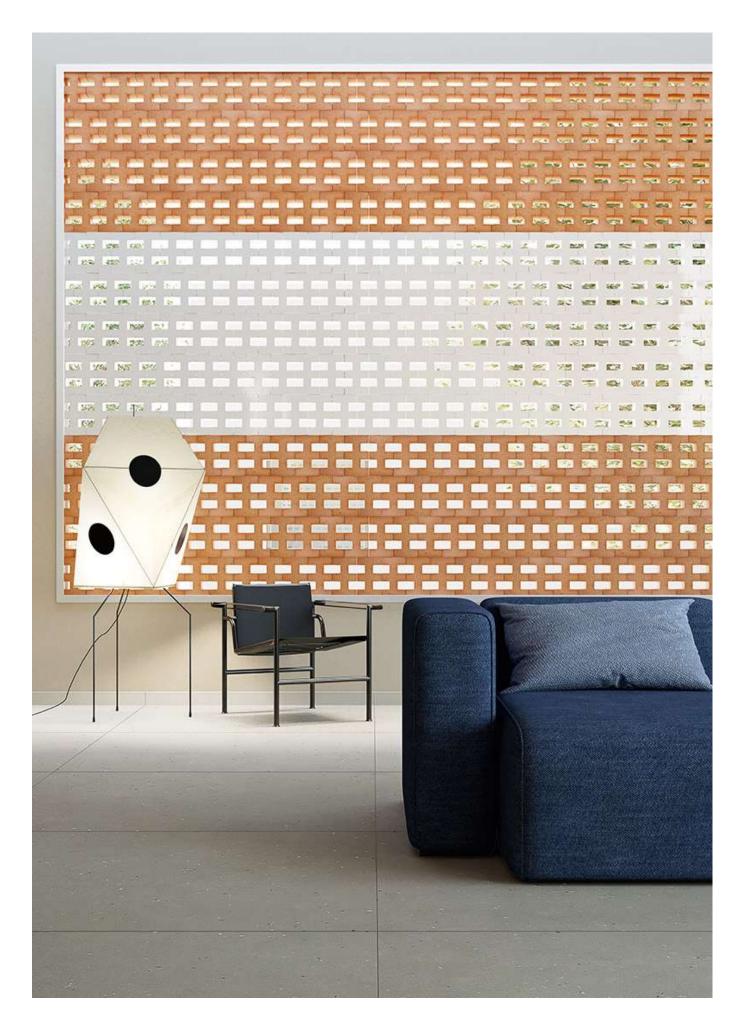



#### General information

collection	Brac
design	Nathalie Du Pasquier, 2019
production	Artisanal
material	Extruded terracotta
thickness	10 cm
nominal sizes	13x22x10 cm
specification	<ul> <li>artisanal extruded partition elements, 10cm thick.</li> <li>5 colours: Argilla (natural finishing), Bianco, Salvia, Marrone, Nero (glossy painted finishing)</li> <li>3 different laying patterns are possible (see attached document).</li> <li>This product is suitable for both residential and commercial areas, to be installed in walls with height of 4mt. These elements must in any case comply with the technical standards of construction regulation, applicable in the country where they are installed. For the Italian national territory, in particular, they should comply with standard NTC 2018 DECRETO MIN 27/01.</li> <li>In order to achieve an optimal aesthetic outcome we advise to install BRAC using our wooden profile. The profile is painted and suitable for outdoor use. A top profile with removable sides is provided for ceiling fixing. As complementary pieces Mutina provide the Mutina sealant, EC 1 plus for VOC emissions. For installation process see the installation video available on www.mutina.it for Celosia (soon available for BRAC and anyway same procedure)</li> <li>Brac Argilla is suitable for indoor and outdoor areas complying with UNI EN 772-22 marked "F1- moderate exposure".</li> <li>Brac Bianco, Nero, Salvia and Marrone are suitable for indoor only.</li> </ul>
awards	Interior Design Magazine's Best of Year Awards 2020 in the Category Architectural Products
patents	Registered design n° 007510870-0041/0044 – date of registration: 14/01/2020
category	UNI 11128/2004




#### complementary pieces






To make the installation of these items easier, a Mutina sealant is now available: an organic and eco-friendly sealing material, which is sold separately.


laying scheme




laying scheme 1 42 pcs / sqm



laying scheme 2 42 pcs / sqm




laying scheme 3 35 pcs / sqm




For security reasons only staggered installation is strictly allowed.


ANCHORING ON 2 SIDES Max h 400 cm



# ANCHORING ON 3 SIDES Max h 400x300 cm



# ANCHORING ON 2 SIDES MAX h250x100 cm





## Laying and maintenance tips

use	Wall – indoor, outdoor for Brac Argilla Wall – indoor for Brac Bianco, Nero, Salvia, Marrone
installation	For security reasons only staggered installation is strictly allowed.
recommended adhesive	Mutina sealant: solvents-free, eco-friendly organic sealant.
recommended joints	-
recommended fillers	-
cleaning at the end of installation	Avoid drippings during installation. If needed the excess can be removed after the product has dried, using a tool with a sharp edge.
general cleaning (installed tiles)	-
calibers (real size)	13 x 22 x 10 cm with 1-3 mm tolerance (artisanal product)

## Colors











Argilla

Bianco

Nero

Salvia

Marrone



#### Technical features

STANDARD	FEATURES	VALUE REQUIRED	BRAC	
UNI EN 772-16	dimensions	to declare	T2-R2	
UNI EN 772-21	water absorption	to declare	12,5%	
UNI EN 772-5	soluble salts content	to declare	S2	
UNI EN 772-22	freeze-thaw resistance	to declare	F1	
D.M. 1401/2008	determination of variable horizontal loads	to declare	C2	
Leed 4.1			10%	
VOC Emission			available upon request	
Declaration of Contents	available upon request		available upon request	
SDS			available upon request	
BPD3			available upon request	
HPD			available upon request	

## Packing

PCS-SQM	PCS-BOX	SQM-PAL	PCS-PAL	KG-PC	KG-PAL
	-	1,35	48	3,70	177,60
	3	4,06	48	3,70	532,80
42					
42					
35					
	42	3 42 42	3 4,06 42 42	3 4,06 48 42 42	3 4,06 48 3,70 42 42

