MUTINA

Adagio Outdoor
by Ronan Bouroullec

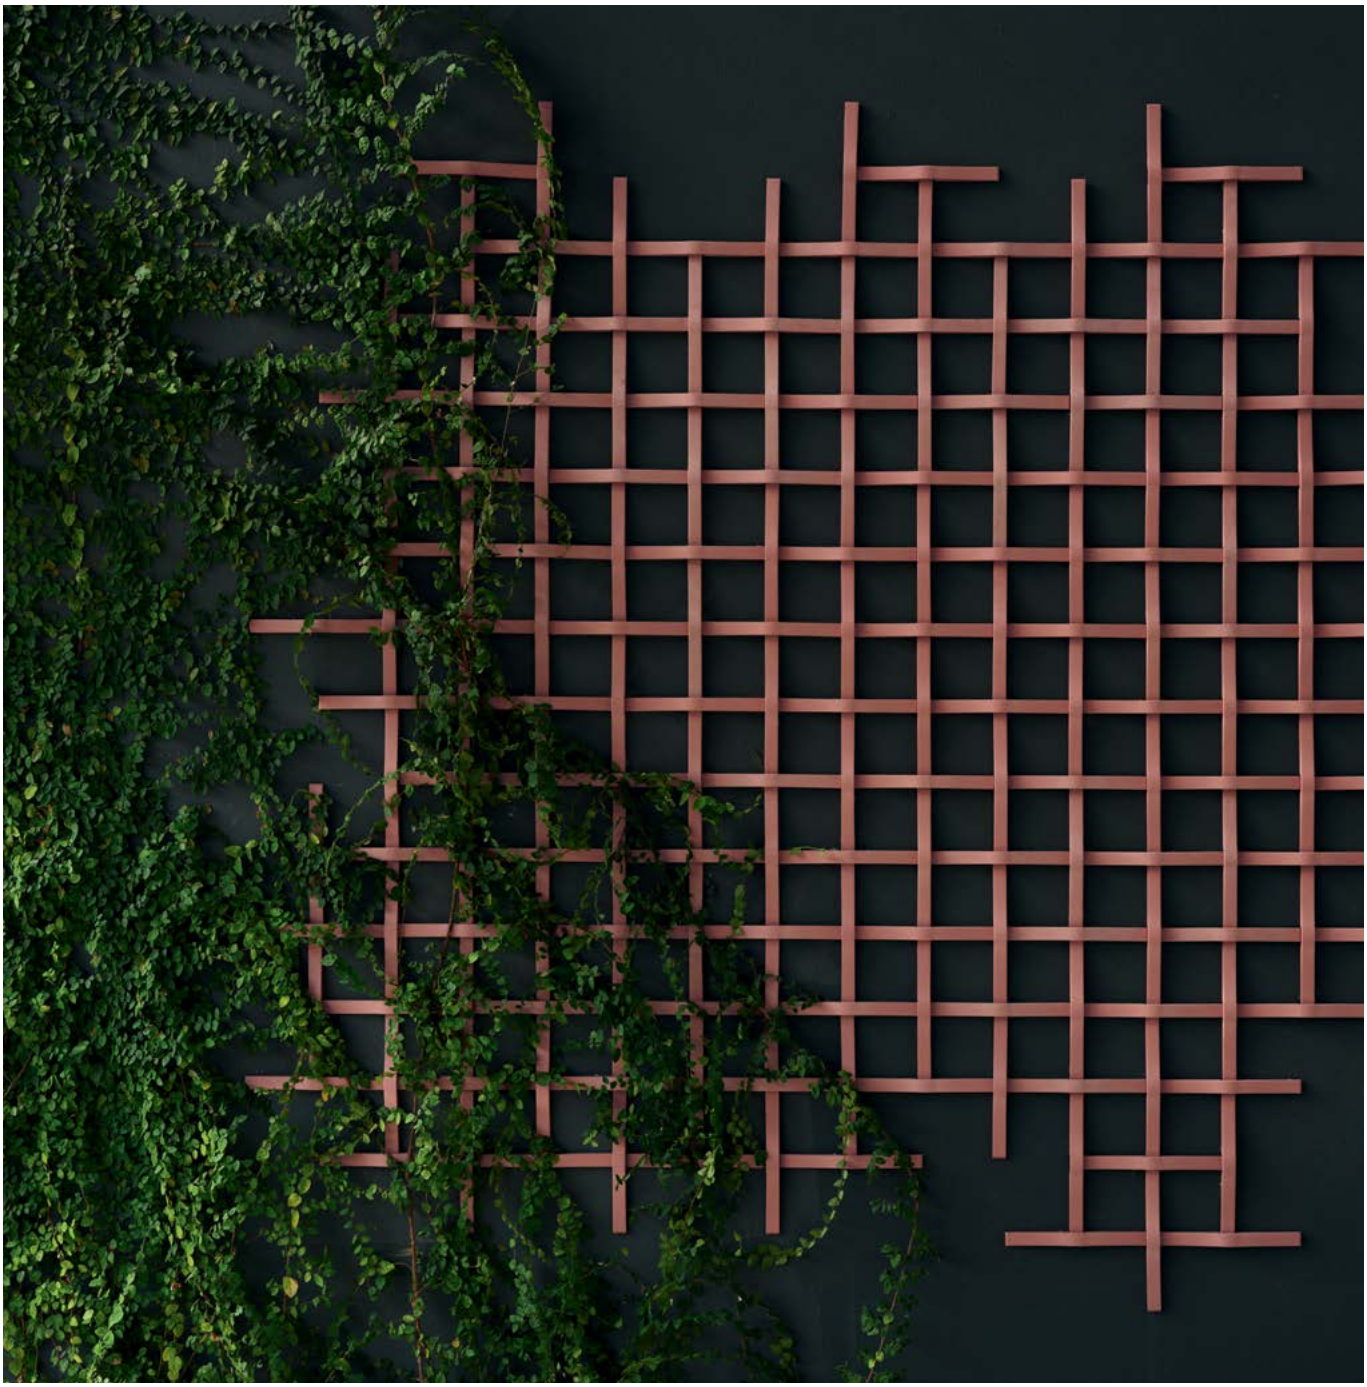

EN

General information
Laying and maintenance tips
Colors
Technical features
Packing

Ceramiche Mutina Spa

Via del Crociale 25 41042 Fiorano Modenese, Italia
T +39 0536812800 F +39 0536812808
info@mutina.it – www.mutina.it

Contract Division
arch@mutina.it

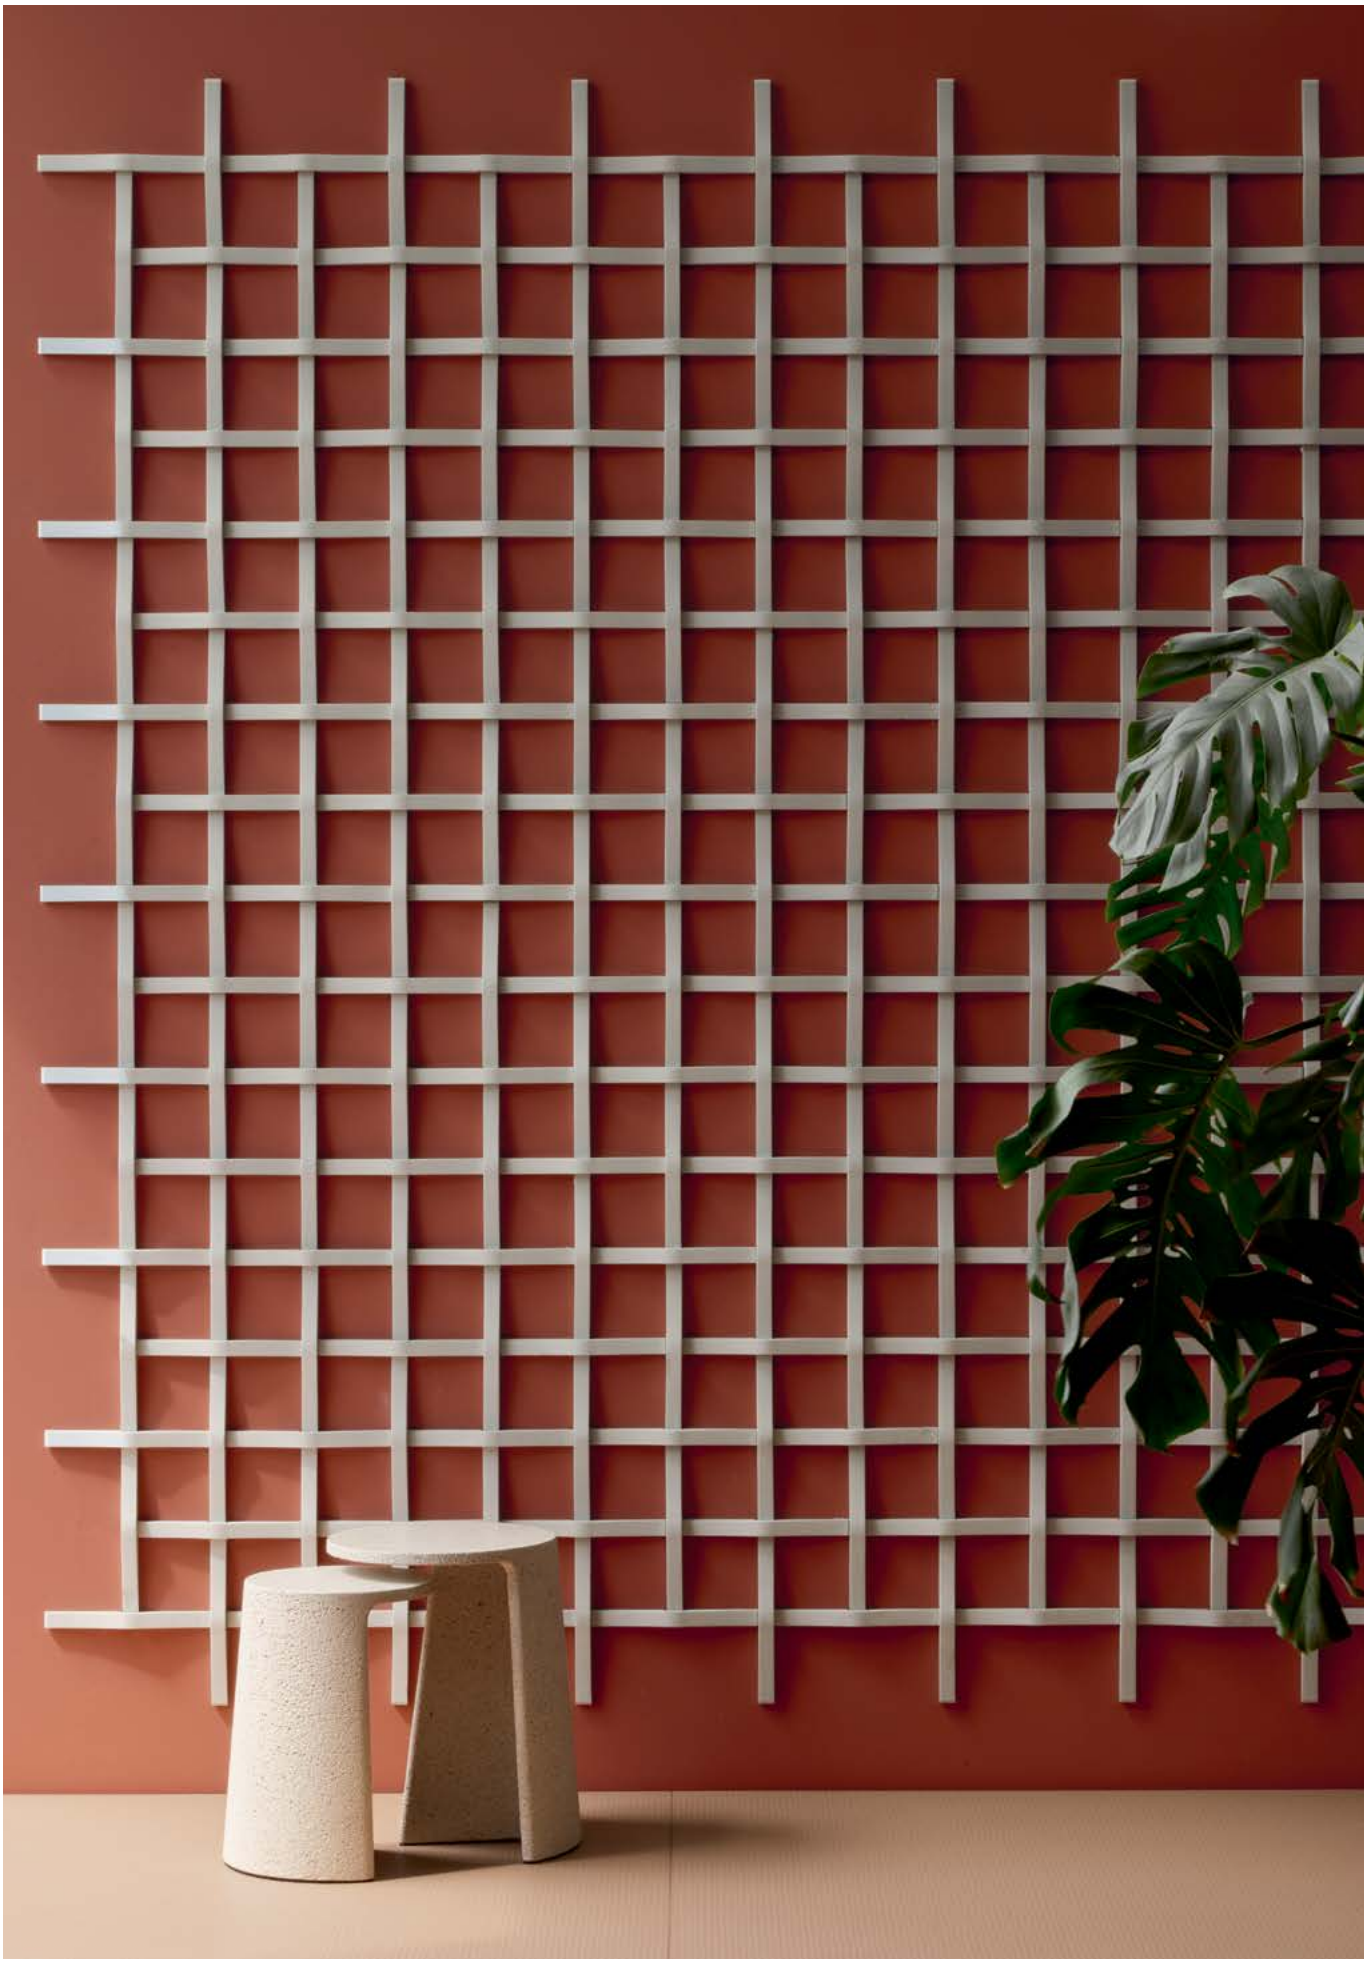

General information

collection	Adagio Outdoor
design	Ronan Bouroullec, 2025
production	Industrial
material	Unglazed porcelain stoneware, with full body coloured mixture
thickness	from 11mm to 26mm
nominal sizes	2,6·28 cm (1”·11”)
specification	– 4 matt colours: White, Chalk, Earth, Olive
category	UNI EN 14411 App G (Bla group) UGL

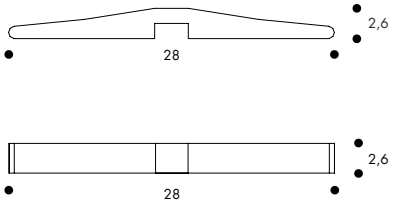

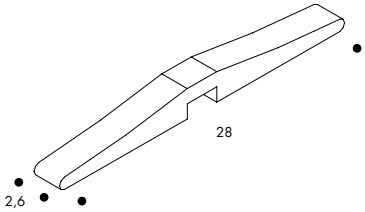

Laying and maintenance tips

use	Wall – indoor, outdoor
installation	For an even, smooth shading effect when laying, alternate material from several different boxes. For the correct installation sequence, follow the video with the assembly instructions and use the appropriate tool, checking correct alignment with laser level.
recommended adhesive	Heat glue and silicone or other structural adhesive (as shown in the video).
cleaning at the end of installation	SILICONE: Solvent for silicone e.g. FILA ZERO SIL. Put it straight onto the stain, wait for 20 minutes and remove the mark using scotch Brite. PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable. RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly.
general cleaning (installed tiles)	We recommend using cleaners specifically formulated for porcelain stoneware
calibers (real size)	± 3 mm tolerance

Colors

White

Chalk

Earth

Olive

Technical features

STANDARD	FEATURES	VALUE REQUIRED	ADAGIO OUTDOOR
ISO 10545/3	water absorption	< 0,5%	0,2%
ISO 10545/13	resistance to acids and alkalis (low and high concentration)	declared value	A
	resistance to household cleaning agents and swimming pool chemicals	minimum class B	A
ISO 10545/14	stains resistance	minimum class 3	3
LEED CERTIFICATION 4.1			available upon request
VOC Emission			available upon request
Declaration of Contents			available upon request
SVHC declaration			available upon request

Packing

SIZE	PCS·SQM	PCS·BOX	SQM·BOX	BOX·PAL	KG·BOX	KG·PAL	SQM·PAL
ADAGIO OUTDOOR	63	40	0,62	14	15,20	131,60	8,68